



Hot dipped Galvanized

Sliding gates

i TECHNICAL CHARACTERISTICS

Frame made of square tubes of 2 and 3 mm width and skirting board with corrugated sheet. It allows the gate automation.

Closure of frame with electro-soldered slatted 60x120 25x3 mm., electro-soldered mesh 50x150x5 mm. or with matching fence material.

Clamping bridges are made of square tube of 80x2 or 3 mm (according to measure).

The rolling guide is made of "IPN" profile and round $\varnothing 18$ mm.

Silent sliding by means of nylon bearing in the bridges.

All components of the gates, the rolling guide included, are hot dip galvanized.



? APPLICATIONS

This gate is designed to be situated in any metallic enclosure formed with framed panels or without frame.



Certification of conformity of Production: CPG-0000021



C/ Blanca, s/n Pol. La Polvorista
30500 Molina de Segura. Murcia



968 611 974
FAX 968 611 858



info@galsusa.es



www.galsusa.es



Hot dipped Galvanized


Sliding gates

▽ FINISH

Hot dipped galvanized UNE-EN ISO 1461 or Galvanized + Painted Polyester.

→ DIMENSIONS (m)

| Nominal | Width Step (A) | Height | Space Opening Gate |
|-----------|----------------|--------|--------------------|
| 4x2.20 m | 4.02 m | 2.20 m | 4.55 m |
| 5x2.20 m | 5.04 m | 2.20 m | 5.55 m |
| 6x2.20 m | 6.05 m | 2.20 m | 6.65 m |
| 8x2.20 m | 8.08 m | 2.20 m | 8.65 m |
| 10x2.20 m | 10.12 m | 2.20 m | 11.15 m |
| 12x2.20 m | 12.15 m | 2.20 m | 13.20 m |

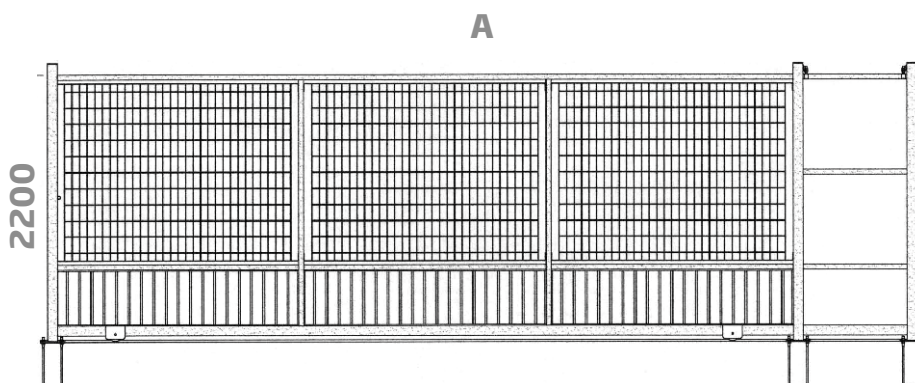

Certification of conformity of
Production:
CPG-0000021



C/ Blanca, s/n Pol. La Polvorista
30500 Molina de Segura. Murcia



968 611 974
FAX: 968 611 858



info@galsusa.es



www.galsusa.es



Senzimir galvanized

Sliding gates

i TECHNICAL CHARACTERISTICS

Frame made of senzimir galvanized tube 60x40x1.5 mm. and skirting board with galvanized sheet 2 mm. with boreholes of 30x30 mm.

Closure of frame with electro-soldered galvanized mesh in wire Ø 5 mm. de 200x50x5 mm., with four reinforcement folds 50x50 mm.

Clamping bridges are made of senzimir galvanized tube 60x40x1.5 mm.

Rolling guide is made of profile to embed 40x64x3 mm. thickness.

Silent sliding by means of nylon bearing in the bridges.



? APLICATIONS

This gate is designed to be situated in any metallic closure formed with framed panels or without frame.



∇ FINISH

Senzimir galvanized or galvanized + painted polyester.

Certification of conformity of Production: CPG-0000021



C/ Blanca, s/n Pol. La Polvorista
30500 Molina de Segura. Murcia



968 611 974
FAX 968 611 858



info@galsusa.es



www.galsusa.es





Sheets and slatted

Smooth slatted gate

→ DIMENSIONS (m)

| Nominal | Width Step (A) | Height | Space Openin Gate |
|----------|----------------|--------|-------------------|
| 4x2.00 m | 4.04 m | 2.10 m | 4.55 m |
| 5x2.00 m | 5.04 m | 2.10 m | 5.55 m |
| 6x2.00 m | 6.08 m | 2.10 m | 6.60 m |
| 7x2.00 m | 7.08 m | 2.10 m | 7.70 m |

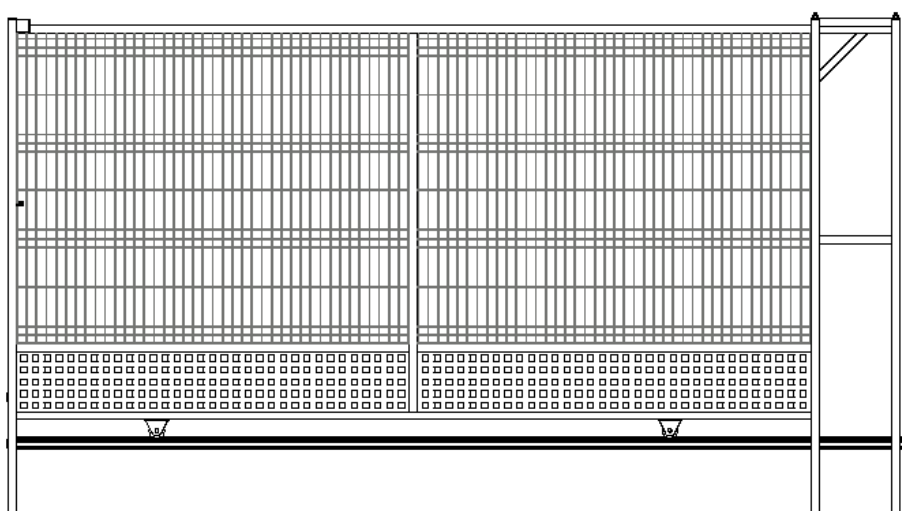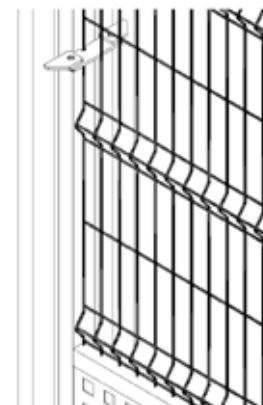

▽ FINISH

Senzimir galvanized or galvanized + painted polyester.

Certification of conformity of Production: CPG-0000021



C/ Blanca, s/n Pol. La Polvorista
30500 Molina de Segura. Murcia



968 611 974
FAX 968 611 858



info@galsusa.es



www.galsusa.es